

# REDEZON 2-MP

## RUBBER WAXES

### Description

The product Redezon 2-MP is a mineral wax acts as a physical antiozonant in unsaturated rubber mixtures.


### Applications

Specially recommended for technical rubber products or tyre manufacturing. Redezon 2-MP migrates to the rubber surface forming a thin layer protecting as an outstanding physical barrier against the ozone attack to the double bonds of the rubber structure. The specially designed carbon distribution of the Redezon 2-MP makes it recommendable for tyre manufacturing giving full protection in a wide range of climate conditions. It is formulated in order to avoid caking so it can be used for long periods under appropriate storage conditions.

### Presentation

The product Redezon 2-MP is packaged in 25 kg. bags. Do not store at temperatures above 40°C, and avoid moisture and direct sunlight. This product should be used within two years from being packaged.

### Carbon Distribution

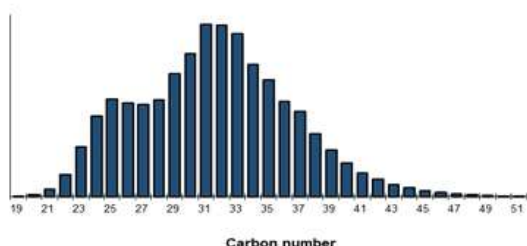

### Technical characteristics

	Unit	Method	Value
Congealing point	°C	ASTM D 938	61,0 – 67,0
Viscosity	cSt	ASTM D-445	5,0 – 7,0
Chromatography, n-paraffins	%p	IT-LAB-129	62,0 – 72,0
Chromatography, maximum First C	-	IT-LAB-129	C25 – C27
Chromatography, maximum Second C	-	IT-LAB-129	C31 – C33

Unless otherwise indicated, the values presented in the technical data should be considered as typical values.